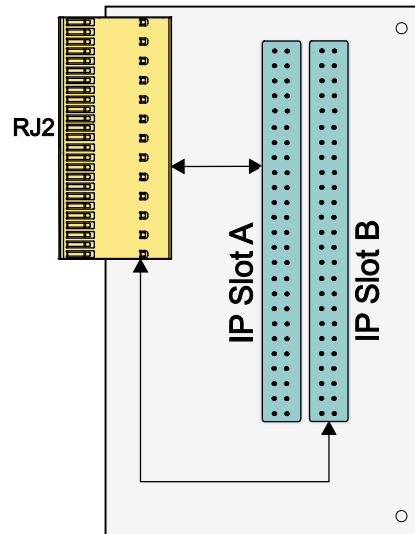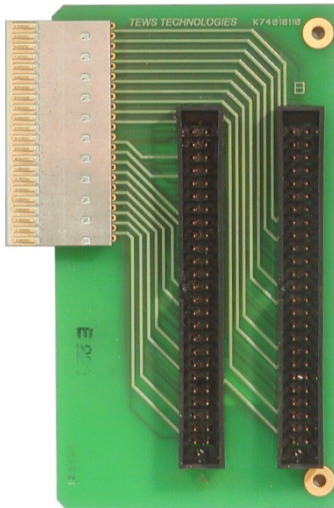# TCP010-TM   Transition Module for 3U cPCI IP Carrier

Application Information

The TCP010-TM is a Transition Module to be used with 3U cPCI IP carrier, providing easy access to the IP I/O lines of cPCI IP carrier with back I/O.

It distributes all 100 IP I/O lines from the cPCI RJ2 connector to two 50 pin ribbon cable connectors allowing easy rack internal wiring.

The TCP010-TM has no front panel.

The operating temperature range is -40°C to +85°C.

Technical Information

- Form Factor: cPCI 3U Rear Transition Module
- I/O Routing:
  - I/O lines are accessible via two 50 pin ribbon cable connectors
- No front panel
- Operating temperature: -40°C to +85°C

Technical Information

RoHS Compliant
TCP010-TM-10R   3U Transition Module for IndustryPack Carrier, 50pin ribbon cable connectors (rack internal)

For the availability of non-RoHS compliant (leaded solder) products please contact TEWS.

Documentation
TCP010-TM-DOC   User Manual