
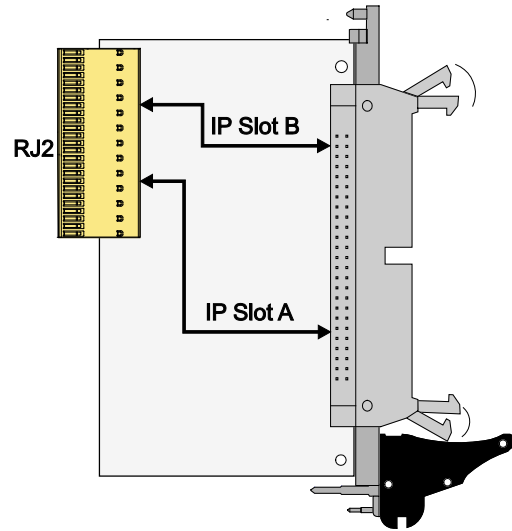


TCP011-TM Transition Module for 3U cPCI IP Carrier

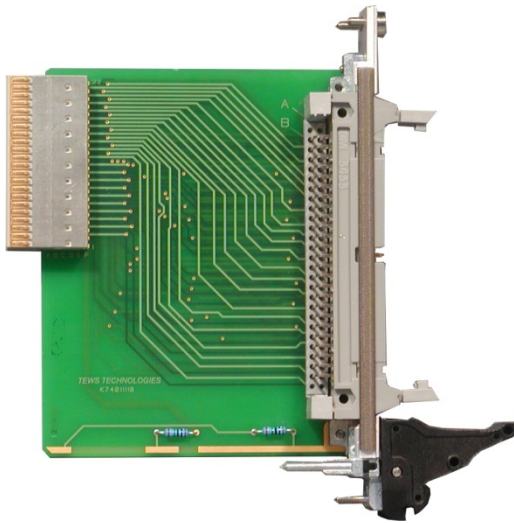

Application Information

The TCP011-TM is a 3U Transition Module to be used with 3U cPCI IP carrier, providing easy access to the IP I/O lines of cPCI IP carrier with back I/O.

It distributes all 100 IP I/O lines from the cPCI RJ2 connector to two 50 pin ribbon cable connectors (stacked version) located in the front panel.

The operating temperature range is -40°C to +85°C.

Technical Information

- Form Factor: cPCI 3U Rear Transition Module (100mm x 80mm)
- I/O Routing:
 - I/O lines are accessible via two 50 pin ribbon cable connectors
- Front panel
- Operating temperature: -40°C to +85°C

Order Information

RoHS Compliant

TCP011-TM-10R 3U Transition Module for IndustryPack Carrier, 50pin ribbon cable connectors (stacked version)

For the availability of non-RoHS compliant (lead solder) products please contact TEWS.

Documentation

TCP011-TM-DOC User Manual