


TCP040-TM PIM Carrier Transition Module for 3U cPCI

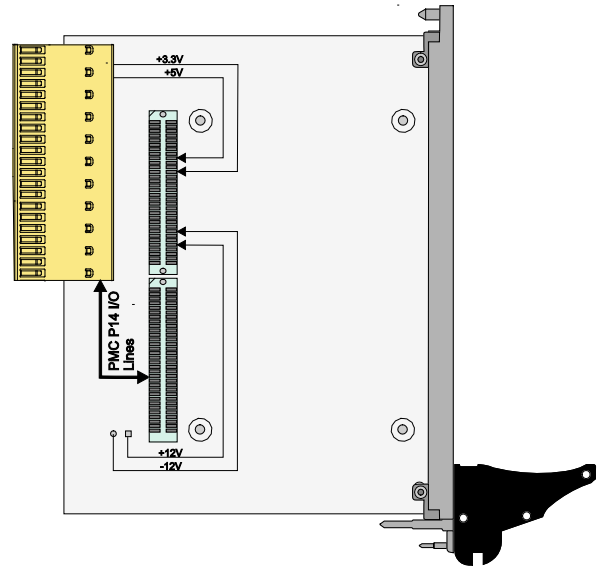

Application Information

The TCP040-TM is a 3U PIM Carrier Transition Module to be used with 3U CompactPCI PMC carrier like TEWS' TCP270 or 3U CompactPCI modules with back I/O. It provides easy access to the PMC I/O lines of 3HE CompactPCI PMC carriers and most TEWS CompactPCI Modules with back I/O.

It distributes all I/O lines of one PMC from the cPCI RJ2 connector to a PIM module.

The operating temperature range is -40°C to +85°C.

Technical Information

- Form Factor: cPCI 3U Rear Transition Module (100 mm x 80 mm)
- I/O Routing:
 - PMC I/O mapping via RJ2
 - I/O lines are accessible via the PIM modules
- EMI front panel
- Operating temperature: -40°C to +85°C

Order Information

RoHS Compliant

TCP040-TM-10R 3U Transition Module for 1 slot PMC Carrier, 1 PIM slot

For the availability of non-RoHS compliant (lead solder) products please contact TEWS.

Documentation

TCP040-TM-DOC User Manual

Related Products

TPIM001	PIM I/O Module, HD50 connector
TPIM002	PIM I/O Module, HD68 connector
TPIM003	PIM I/O Module, HD68 connector, special pin assignment
TPIM005	PIM I/O Module, HD68 connector, for TPMC863/TPMC363
TPIM006	PIM I/O Module for Quad 10/100/1000 Ethernet PMC