


TCP462 4 Channel Serial Interface RS232/RS422

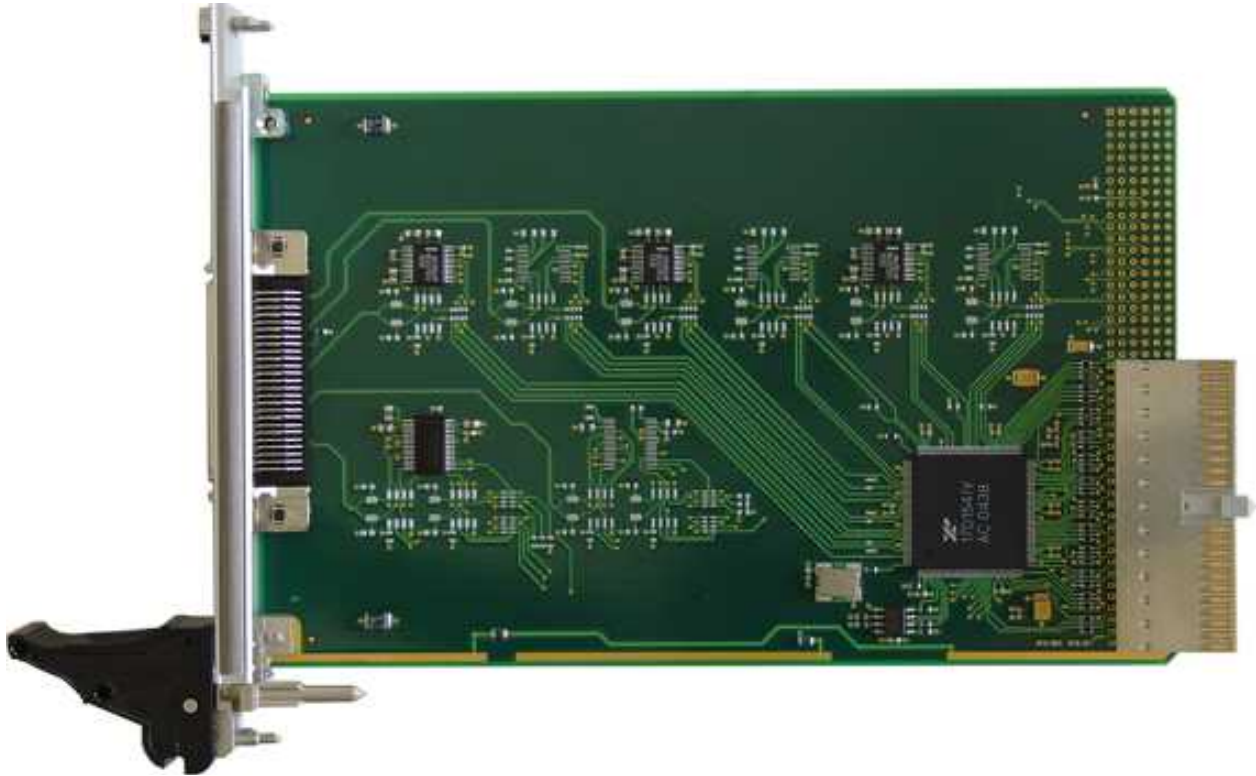

Application Information

The TCP462 is a standard 3U 32 bit CompactPCI module and offers 4 channels of high performance asynchronous serial interface.

Three different standard modules are available: The TCP462-10R provides 4 RS232 interfaces. The TCP462-11R provides 4 RS422 interfaces. The TCP462-12R provides 2 RS232 and 2 RS422 interfaces.

Other configurations are available as factory build option on a per channel base.

All modules offer front panel I/O with a HD50 SCSI-2 type connector. The TCP462-2xR modules offer additional J2 rear I/O. Each RS232 channel supports Rx, Tx, RTS, CTS and GND. Each RS422 channel supports Rx+/-, Tx+/- and GND. One channel of the TCP462-x0R/-x2R offers full modem support (Tx, Rx, CTS, RTS, DSR, DTR, CD, RI and GND) for RS232. One channel of the TCP462-x1R supports Rx+/-, Tx+/-, RTS+/-, CTS+/- and GND for RS422.

Each channel has 64 byte transmit and receive FIFOs to significantly reduce the overhead required to provide data to and get data from the transmitters and receivers. The FIFO trigger levels are programmable and the baud rate is individually programmable up to 921.6 kbps for RS232 channels and 5.5296 Mbps for RS422 channels. The UART offers readable FIFO levels.

All channels generate interrupts on CompactPCI interrupt INTA. For fast interrupt source detection the UART provides a special Global Interrupt Source Register.


All serial channels use ESD protected transceivers up to $\pm 15\text{KV}$.

The TCP462 can operate with 3.3V and 5.0V PCI I/O signaling voltage.

Software Support (TDRV002-SW-xx) for different operating systems is available.

Technical Information

- Standard 3U 32 Bit CompactPCI module conforming to PICMG 2.0 R3.0
 - Target Chip: XR17D154 (Exar)
 - PCI 2.3 compliant interface
 - PCI I/O signaling voltage 5V and 3.3V
- Board size: 160 mm x 100 mm
- Asynchronous serial interface
- Quad UART: Exar XR17D154
- Support of RxD, TxD, RTS, CTS and GND for each RS232 channel; RxD+/-, TxD+/- and GND for each RS422 channel. One channel offers extended support (full modem or RTS+/- and CTS+/-)
- Programmable baud rates:
 - RS232: up to 921.6 kbps
 - RS422: up to 5.5296 Mbps
- 64 byte transmit FIFO per channel
- 64 byte receive FIFO per channel
- Readable FIFO levels
- Global Interrupt Source Register
- General Purpose 16 bit Timer/Counter
- ESD protected transceiver (up to ± 15KV)
- Operating temperature -40°C to +85°C

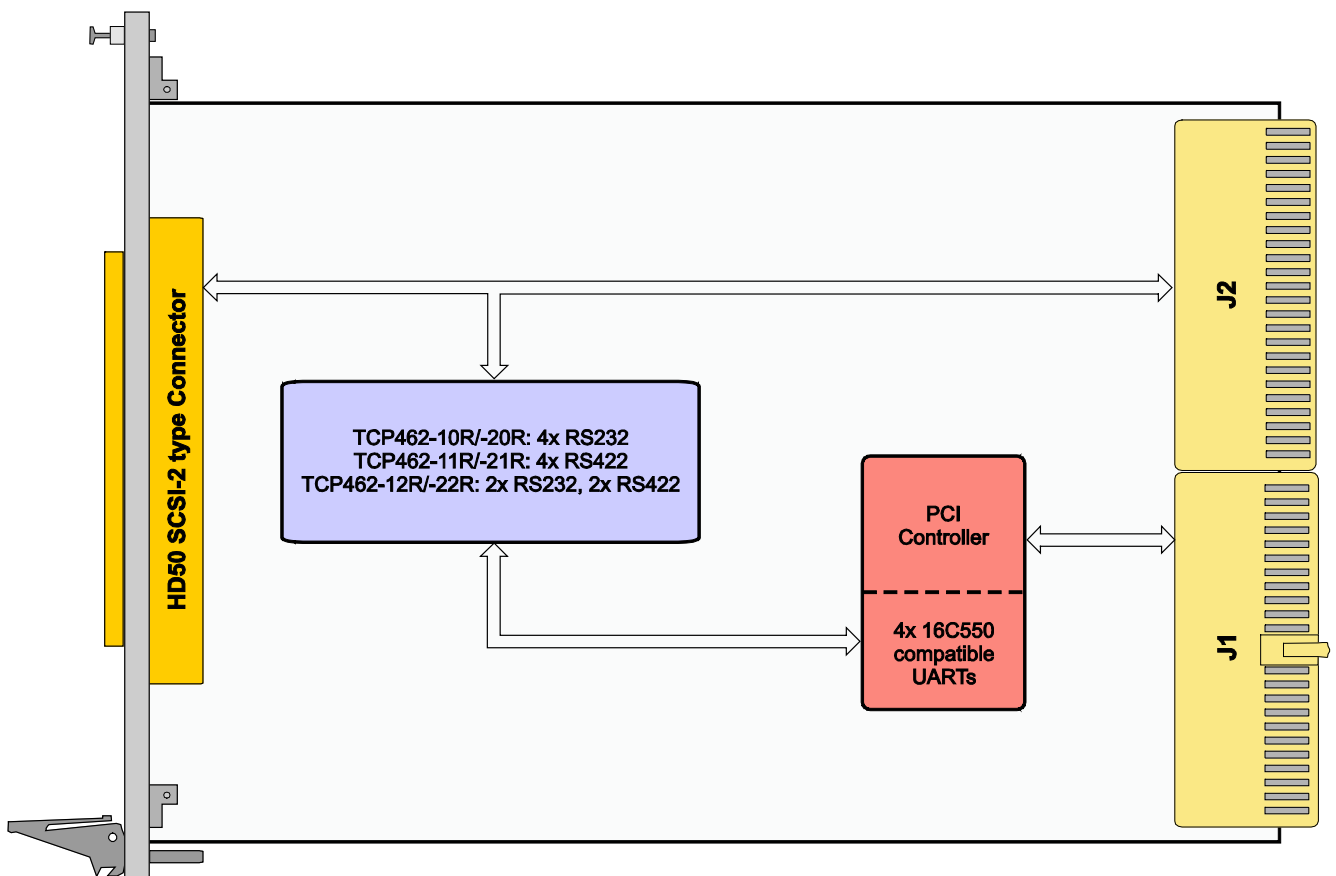

Order Information

RoHS Compliant

TCP462-10R	4 Channel Serial RS232, HD50
TCP462-11R	4 Channel Serial RS422, HD50
TCP462-12R	2 Channel Serial RS232, 2 Channel Serial RS422, HD50
TCP462-20R	4 Channel Serial RS232, HD50 and J2 I/O
TCP462-21R	4Channel Serial RS422, HD50 and J2 I/O
TCP462-22R	2 Channel Serial RS232, 2 Channel Serial RS422, HD50 and J2 I/O

Other configurations are available as factory option on a per channel base.

For the availability of non-RoHS compliant (lead solder) products please contact TEWS.

Documentation

TCP462-DOC	User Manual
-------------------	-------------

Software

TDRV002-SW-25	Integrity Software Support
TDRV002-SW-42	VxWorks Software Support (Legacy and VxBus-Enabled Software Support)
TDRV002-SW-65	Windows Software Support
TDRV002-SW-82	Linux Software Support
TDRV002-SW-95	QNX Software Support

For other operating systems please contact TEWS.

Accessories

TA301	Cable Kit for Modules with HD50 Connector
TCP001-FP	6U Front Panel Extension for 3U cPCI Boards