


TIP850 16 Channel 12 bit A/D, 4 Channel 12 bit D/A

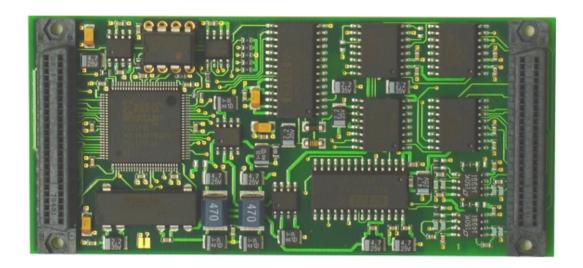

Application Information

The TIP850 is an IndustryPack® compatible module and offers 16 single-ended or 8 differential channels of 12 bit A/D conversion together with 4 channels of 12 bit D/A conversion

The input multiplexer of the A/D circuit offers analog overvoltage protection of up to 70Vpp. A programmable gain amplifier allows gains of 1, 10, 100 or 1, 2, 4, 8. The full-scale input range is +/-10V. The data acquisition and conversion time is up to 10 μ s without channel / gain change and up to 62 μ s with channel / gain change.

The four D/A channels provide simultaneous loading and output voltages of +/-10V. Default value after reset is 0V for all D/A channels. The settling time to 0.01% is 10µs maximum. Each TIP850 is factory calibrated. The calibration information for A/D and D/A circuits are stored in the Identification PROM unique to each IP.

Software Support (TIP850-SW-xx) is available for different operating systems.


Technical Information

- Interface according to IndustryPack specification
- O Identification-PROM supports auto-configuration
- O Single Size IndustryPack
- O 16 single-ended or 8 differential channels of 12 bit A/D conversion
- ESD protected input multiplexer
- O Programmable gain amplifier gain 1, 10, 100 or gain 1, 2, 4, 8
- Complete 12 bit A/D converter with internal S/H and reference (100 KHz)
- O Full-scale input range +/- 10 V (gain = 1)
- 4 channels of 12 bit D/A conversion, simultaneous load
- O Output range +/-10V, 0V after RESET
- O Factory calibrated, calibration information in Identification-PROM unique to each IP
- O Operating temperature -40°C to +85°C

TEWS TECHNOLOGIES GmbH keeps the right to change technical specification without further notice. All trademarks mentioned are property of their respective owners.



The Embedded I/O Company

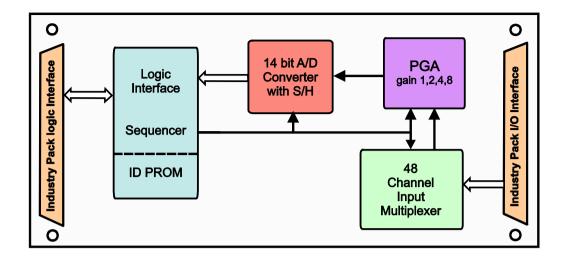

Order Information

RoHS Compliant

TIP850-10R16 Channel multiplexed 12 bit A/D, gain 1,10,100, +/-10V; 4 Channel D/A, +/-10V **TIP850-11R**16 Channel multiplexed 12 bit A/D, gain 1,2,4,8, +/-10V; 4 Channel D/A, +/-10V

For the availability of non-RoHS compliant (leaded solder) products please contact TEWS.

Documentation

TIP850-DOC User Manual

Software

TIP850-SW-42 VxWorks Software Support (Legacy and VxBus-Enabled Software Support)

TIP850-SW-65 Windows Software Support
TIP850-SW-82 Linux Software Support
TIP850-SW-95 QNX Software Support

For other operating systems please contact TEWS.

TEWS TECHNOLOGIES GmbH keeps the right to change technical specification without further notice. All trademarks mentioned are property of their respective owners.