
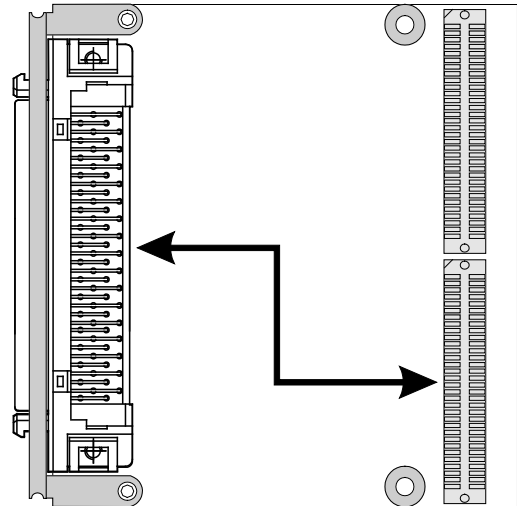


## TPIM002 PIM I/O Module with 68 pin Connector

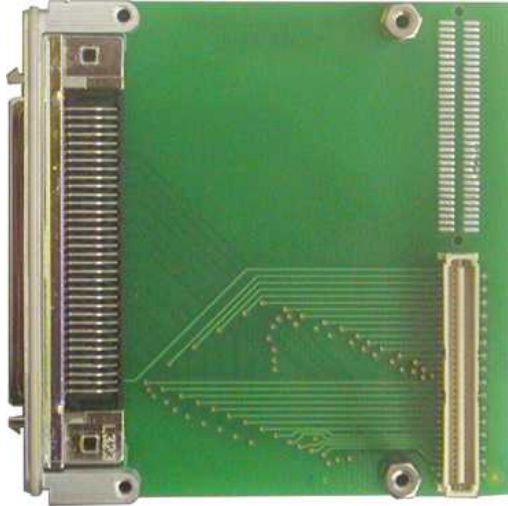

### Application Information

The TPIM002 is a standard single-width PIM I/O module to be used with any PIM carrier. It offers easy access to the PMC back I/O lines of PMC carrier with back I/O.

The TPIM002 distributes all PMC back I/O lines to a 68 pin SCSI-3 type connector located in the EMI front panel.

The operating temperature range is -40°C to +85°C.

### Technical Information

- Standard single-width PIM I/O Module
- Board size: 69 mm x 74 mm
- I/O lines are routed to a HD68 SCSI-3 type connector in the front panel
- EMI Front Panel
- Operating Temperature: -40°C to +85°C

### Order Information

#### RoHS Compliant

**TPIM002-10R** PIM I/O Module, HD68 connector

For the availability of non-RoHS compliant (lead solder) products please contact TEWS.

#### Documentation

**TPIM002-DOC** User Manual