


TQMC802 4 Channel isolated CAN FD Bus

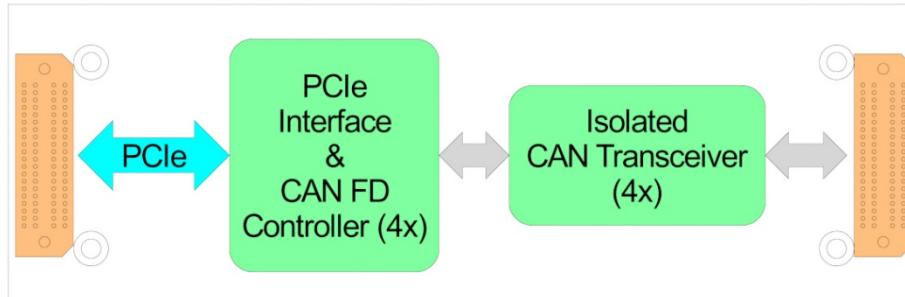

TQMC802

Application Information

The TQMC802 is a standard single-width QMC module conforming to the VITA 93.0 standard for small form factor (SFF) mezzanine modules. It offers 4 independent isolated CAN bus interfaces.

Additionally to the CAN 2.0 part A and B specification, CAN FD with data rates up to 5 Mbps is supported.

All channels have the capability to transmit, receive and perform message filtering on CAN FD, extended and standard messages.

Each channel supports CAN FD according to ISO11898-2 as the physical interface. The bus line termination is software selectable, separate for each interface. Each channel provides fault protected transceivers with data rates up to 5 Mbps.

Software Support for different operating systems is available.

The TQMC802 is available as air cooled and conduction cooled variant.



Conduction Cooled QMC

Technical Information

- Form Factor: Standard single QMC module conforming to VITA 93.0
 - Board size: 26 mm x 78.25 mm
- PCI Express 2.1 compliant interface
- IPMI resource: FRU hardware definition information stored in on-board EEPROM
- 4 individual isolated Channels CAN FD Bus
- Classic CAN backwards compatible
- Programmable transfer rates
- Fault protected Transceivers with Data Rates up to 5 Mbps
- Software selectable Termination
- Operating temperature -40 °C to +85 °C
- Mean Time Between Failure (MTBF)
 - Contact Factory

Order Information**RoHS Compliant**

TQMC802-10R-A 4 x isolated CAN FD Bus, air cooled

TQMC802-10R-H 4 x isolated CAN FD Bus, conduction cooled

For the availability of non-RoHS compliant (leaded solder) products please contact TEWS.

For the availability of conformal coated products please contact TEWS.