


## TVME001-TM Transition Module for VME64x Back I/O



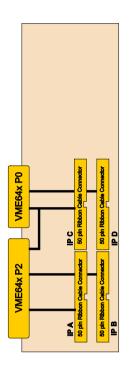

## **Application Information**

The TVME001-TM is a Transition Module for use with VME64x backplanes, providing easy and concise access to the I/O lines of back I/O IP carriers.

It brings all 200 IP I/O lines from the VME64x P0 and P2 connectors out to four 50 pin ribbon cable connectors. The routing between the VME64x P0 and P2 connectors and the 4 ribbon cable connectors is ANSI/VITA 4.1-1996 compliant.

The operating temperature ranges is -40°C and +85°C.

## **Technical Information**

- O Form Factor: VME64x Rear Transition Module
- O I/O Routing:
  - ANSI/VITA 4.1-1996 compliant I/O mapping (P0 and P2)
  - I/O lines are accessible via four 50 pin ribbon cable connectors
- No front panel
- O Operating temperature: -40°C to +85°C

## **Order Information**

**RoHS Compliant** 

TVME001-TM-10R 6U Transition Module for VME64x IndustryPack Carrier, 50pin 180° ribbon cable

connectors

For the availability of non-RoHS compliant (leaded solder) products please contact TEWS.

**Documentation** 

TVME001-TM-DOC User Manual

TEWS TECHNOLOGIES GmbH keeps the right to change technical specification without further notice. All trademarks mentioned are property of their respective owners.

Issue 1.0.1 2017-09-07