

TVME210 VMEbus Carrier for 2 IndustryPacks®



TVME210-10R



TVME210-11R

Application Information

The TVME210 is a 3U VMEbus Carrier for up to two single-size or one double-size IndustryPack (IP) modules allowing to build up modular, flexible and cost effective I/O solutions for all kinds of applications like process control, medical systems, telecommunication and traffic control.


Two 50 pin 0.1 inch flat ribbon cable connectors mounted in the front panel of the TVME210 provide access to all IP I/O lines. Status indicators for IP access, +5V and +/-12V are provided.

A set of 16-position rotary switches allows easy configuration of VME Short I/O and Memory addresses. Interrupt routing from the IP slots to the VME IRQ's can be done in two ways: programmable by software or selection of predefined sets by a rotary switch.

The IP power lines are fuse protected by self healing fuses and RF filtered. The operating temperature range is -40°C and +85°C.

Technical Information

- Form Factor: VMEbus board, 3U
- VMEbus Slave Interface:
 - Short I/O: A16, D08/16, size: 512 bytes
 - Standard Memory: A24, D08/16
 - Size: programmable, 32 Kbytes to 4 Mbytes per IP or 2 Mbytes to 8 Mbytes for one IP
 - Interrupts: IRQ1-7
- ANSI/VITA 4-1995 compliant interface to IndustryPack modules
 - IndustryPack slots: Two single-size or one double-size with front panel I/O
 - 8 MHz interface, no DMA
- Routing of IP Interrupt Levels to VME IRQ1-7: programmable by software or selection of predefined sets by a rotary switch
- I/O access: 50 pin 0.1 inch flat ribbon cable connector (1x90°, 1x180°) per IP mounted in front panel
- Status LED's
 - ACK LED for each IP module
 - +5V Power LED for each IP slot
 - +12V and -12V Power LED
- Self Healing fuses and RF-filtering on all IP power lines
- Operating Temperature -40°C to +85°C

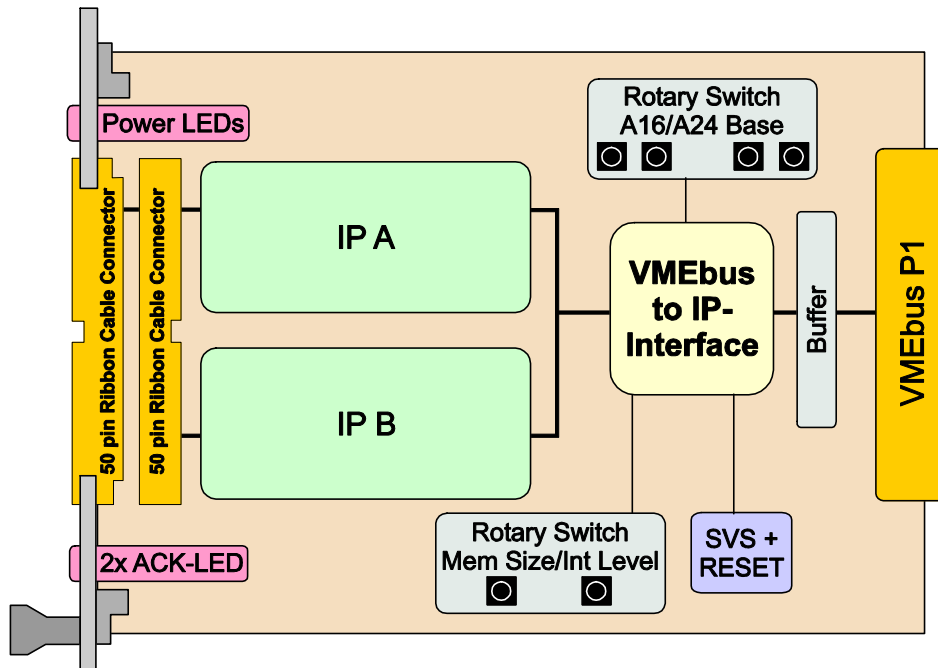

Order Information

RoHS Compliant

TVME210-10R 3U 2 Slot IndustryPack Carrier, 50pin ribbon cable connectors

TVME210-11R 6U 2 Slot IndustryPack Carrier, 50pin ribbon cable connectors

For the availability of non-RoHS compliant (lead solder) products please contact TEWS.

Documentation

TVME210-DOC User Manual

Software

CARRIER-SW-42 VxWorks Software Support (Legacy and VxBus-enabled Software Support)

CARRIER-SW-82 Linux IP Carrier Software Support

CARRIER-SW-95 QNX IP Carrier Software Support

For other operating systems please contact TEWS.

Related Products

TA305 Cable Kit for Modules with 50 pin ribbon cable connector